BLUE SEA SYSTEMS

### DC

#### Contura

- For use with open cockpit and flybridge applications using switches to compliment existing controls commonly used
- Designed for 12 or 24 volt systems
- Watertight mounting gasket
- ON indicating LED embedded in all switches
- Includes small format label set 8217 or 8214
- Switching rating: 20 amps@ 12 volts DC/ 15 amps@ 24 volts DC
- Circuit breaker rating: 15 amps, CLB

#### Weatherdeck Waterproof

- Green LED illuminated circuit label
- Integrated switch guards reduce risk of accidental switching
- Independent label backlighting allows switching and dimming
- Multiple panel mount options
- Panel front rated IP67, when properly mounted with water tight mounting gasket
- UV stabilized weather resistant faceplate, square format labels includes amp max operating:
  15 amps@ 12 volts DC (per circuit)/ 9 amps@ 24 volts DC
- Backlight voltage 12 or 24 VDC
- Circuit breaker rating: 15 amps, CLB





8272





8372



8274

4376

Item Number	Direction/Color	Breakers Amt	Dimensions in" (mm) WxHxD	Price
		Contura Water Resistant		
8274	Vertical/White	3	4.50(114.30) x 3.75(95.25) x 3.25(82.55)	\$136.99
8272	Horizontal/White	4	5.25(133.35) x 4.25(107.95) x 3.25(82.55)	\$165.99
8273	Vertical/White	6	4.50(114.30) x 7.5(190.50) x 3.25(82.55)	\$219.99
8271	Horizontal/White	8	9.37(238) x 4.25(107.95) x 3.25(82.55)	\$283.99
8374	Vertical/Black	3	4.50(114.30) x 3.75(95.25) x 3.25(82.55)	\$136.99
8372	Horizontal/Black	4	5.25(133.35) x 4.25(107.95) x 3.25(82.55)	\$165.99
8373	Vertical/Black	6	4.50(114.30) x 3.75(95.25) x 3.25(82.55)	\$219.99
8371	Horizontal/Black	8	9.37(238) x 4.25(107.95) x 3.25(82.55)	\$283.99
		Weatherdeck Waterproof		
4374	Vertical/Black	4	4.25(107.95) x 4.3(109.22) x 3.5(88.9)	\$124.99
4376	Vertical/Black	6	4.25(107.95) x 6(152.4) x 3.5(88.9)	\$154.99
4378	Vertical/Black	8	4.25(107.95) x 7.7(195.58) x 3.5(88.9)	\$215.99

### (Continued on page 52)

# Design and Order a Custom Panel in Three Easy Steps Design and Order custom panels online


The 360 Panel System uses an open frame to mount a broad selection of modules, allowing multiple functions to be combined in a single panel. This innovative design offers a wide choice os AC and DC panel features, can accommodate future changes, and permits rapid assembly. With options ranging from battery management to source selection, the 360 Panel System provides a wide range of design flexibility.



#### BLUE SEA SYSTEMS



Blue Sea Systems labels are made using a scratch resistant polycarbonate material and are back-printed for durability. Custom Labels for the 360 Panel System can be ordered in any language and are available directly from Blue Sea Systems along with over 500 standard or square format labels.

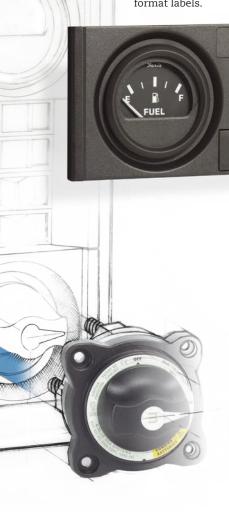

1

### Launch

the Panel Wizard at wards.panelwizard.bluesea.com



2

### Design

the panel with modules, circuit breakers, and labels. The list price is updated with each change.

3

### Save

the panel design and request a quote. Panels ship within ten business days of order receipt.





### Completed $3 \times 3$ Panel



#### BLUE SEA SYSTEMS

### Custom 360 Panel System


Flexible frame and module configurations from a single module to a 25 module panel with 100 circuit breakers.


### Completed 2 × 2 Panel





Rows x Columns	Height in (mm)	Width in (mm)	Cut out Height in (mm)	Cut out Width in (mm)
1 x 1	4.75 (120.65)	4.88 (123.83)	3.31 (84.07)	4.38 (111.13)
2 x 1	7.75 (196.85)	4.88 (123.83)	6.31 (160.27)	4.38 (111.13)
3 x 1	10.75 (273.05)	4.88 (123.83)	9.31 (236.47)	4.38 (111.13)
4 x 1	13.75 (349.25)	4.88 (123.83)	12.31 (312.67)	4.38 (111.13)
5 x 1	16.75 (425.45)	4.88 (123.83)	15.31 (388.87)	4.38 (111.13)
1 x 2	4.75 (120.65)	9.25 (234.95)	3.31 (84.07)	8.75 (222.25)
2 x 2	7.75 (196.85)	9.25 (234.95)	6.31 (160.27)	8.75 (222.25)
3 x 2	10.75 (273.05)	9.25 (234.95)	9.31 (236.47)	8.75 (222.25)
4 x 2	13.75 (349.25)	9.25 (234.95)	12.31 (312.67)	8.75 (222.25)
5 x 2	16.75 (425.45)	9.25 (234.95)	15.31 (388.87)	8.75 (222.25)
1 x 3	4.75 (120.65)	13.63 (346.08)	3.31 (84.07)	13.13 (333.38)
2 x 3	7.75 (196.85)	13.63 (346.08)	6.31 (160.27)	13.13 (333.38)
3 x 3	10.75 (273.05)	13.63 (346.08)	9.31 (236.47)	13.13 (333.38)
4 x 3	13.75 (349.25)	13.63 (346.08)	12.31 (312.67)	13.13 (333.38)
5 x 3	16.75 (425.45)	13.63 (346.08)	15.31 (388.87)	13.13 (333.38)
1 x 4	4.75 (120.65)	18.00 (457.20)	3.31 (84.07)	17.50 (444.50)
2 x 4	7.75 (196.85)	18.00 (457.20)	6.31 (160.27)	17.50 (444.50)
3 x 4	10.75 (273.05)	18.00 (457.20)	9.31 (236.47)	17.50 (444.50)
4 x 4	13.75 (349.25)	18.00 (457.20)	12.31 (312.67)	17.50 (444.50)
5 x 4	16.75 (425.45)	18.00 (457.20)	15.31 (388.87)	17.50 (444.50)
1 x 5	4.75 (120.65)	22.38 (568.33)	3.31 (84.07)	21.88 (555.63)
2 x 5	7.75 (196.85)	22.38 (568.33)	6.31 (160.27)	21.88 (555.63)
3 x 5	10.75 (273.05)	22.38 (568.33)	9.31 (236.47)	21.88 (555.63)
4 x 5	13.75 (349.25)	22.38 (568.33)	12.31 (312.67)	21.88 (555.63)
5 x 5	16.75 (425.45)	22.38 (568.33)	15.31 (388.87)	21.88 (555.63)













m-Series Battery Switch



m-ACR Automatic Charging Relay



m-LVD Low Voltage Disconnect



Battery Management



Battery Management Blank



P12 Battery Charger Remote Display

#### **BLUE SEA SYSTEMS**



DC Flat Rocker Circuit Breaker



Rotary Switch Source Selection



M2 OLED Meter



2 Inch Gauge



COTS Circuit Breaker



Circuit Breaker Source Selection



Digital Meter



2 Inch Gauge Blan



Push Button Circuit Breaker with Rocker Switch



Residual Current Circuit Breaker



Vessel Systems Monitor



Socket, Dual USB Charger



Push Button Circuit Breaker



European RCBO Mount



Analog Meter



DC Accessories



Bilge Pump



Medium Duty Push Button Circuit Breaker



DIN Meter



120V AC Dual Outlet



AC Flat Rocker Circuit Breaker



285 Series Circuit Breaker



Blank / Custom BusBar Module



120V AC Dual Outlet Blank

#### BLUE SEA SYSTEMS

## **DC** (Continued)

### **Branch Circuit 360 Series**

- Used with A series style circuit breakers
- ON Indicating LED in all circuit positions
- Includes 4205 label set

- Panels with voltmeter include a toggle switch to monitor voltage on up to three battery banks
- Pushbutton reset only circuit breakers









BS1457

BS1200

BS1201

Item Number	Total Positions	Circuit Breaker	Dimensions in "(mm) WxHxD	Price	
Branch Circuit Breaker					
BS1457	8	8 P/B(10A) & 8 cb On-Off spst	4.88(123.3) x 7.75(196.85) x 3.50(88.9)	\$201.99	
BS1200	8	8(15A)	4.88(123.3) x 7.75(196.85) x 3(76.20)	\$420.63	
BS1223	12	12(15A)	4.88(123.83) x 10.75(273.05) x 3(76.20)	\$615.99	
BS1201	16 w/ Voltmeter & Ammeter	16 (15A)	13.63(36.08) x 7.75(196.85) x 3(76.20)	\$999.99	

### AC

### Main Circuit Breaker

- Used with A series style circuit breakers
- Red reverse polarity indication LED
- Green ON indicating LED
- Backlit label positions for select models
- 120 volts AC nominal voltage

### Branch Circuit

- ON indicating LED in all circuit positions
- Backlit label positions
- 100 max amps
- Flat rocker actuators



BS1210

Item Number	Total Positions	Circuit Breaker	Dimensions in "(mm) WxHxD	Price		
Branch Circuit Breaker						
BS1210	4	4 (15A)	4.88(123.83) x 4.75(120.65) x 3(76.20)	\$259.99		